

# Datacomm / ITS



## CADDY® CAT LINKS

Patent Pending

### Features

- Provides proper support of cabling (CAT6a and higher)
- CADDY® fasteners easily attach to any size CADDY CAT LINKS J-hook
- cULus® Listed and complies with NEC® and TIA<sup>SM</sup> requirements for structured cabling systems
- Cost effective alternative to expensive cable tray
- Pre-galvanized J-hooks provide smoother cable pull and greater corrosion resistance

Part Number	Fig. #	Description	Standard Packaging Quantity
CAT16HP	1	1" J-hook designed for CAT6a and higher cabling	50
CAT32HP	1	2" J-hook designed for CAT6a and higher cabling	50
CAT48HP	1	3" J-hook designed for CAT6a and higher cabling	25
CAT64HP	1	4" J-hook designed for CAT6a and higher cabling	25
CATHPA4	2	CATHP Angle Bracket with 1/4" hole	50
CATHPA6	2	CATHP Angle Bracket with 3/8" hole	50
CATHPAN	2	CATHP Angle Bracket with 3/16" hole	50
CATHP54	3	CATHP Straight Bracket with 3/8" hole	50
CATHPMT	4	CATHP Tree Mounting Bracket	50
CATHP24	5	Hammer-on assembly for 1/4"-1/8" flange with 360° rotation	25
CATHP58	5	Hammer-on assembly for 5/16"-1/2" flange with 360° rotation	25
CATHP912	5	Hammer-on assembly for 1/2"-3/4" flange with 360° rotation	25
CATHPBCB	6	Screw-on beam assembly for 1/8"-1/2" flange with 360° rotation	25
CATHPBC200B	7	Screw-on beam assembly for 1/8"-5/8" flange with 360° rotation	25
CATHP24SM	8	Hammer-on assembly for 1/8"-1/4" flange	50
CATHP58SM	8	Hammer-on assembly for 5/16"-1/2" flange	50
CATHP912SM	8	Hammer-on assembly for 1/2"-3/4" flange	25
CATHPBC	9	Screw-on beam assembly for 1/8"-1/2" flange	50
CATHPBC200	10	Screw-on beam assembly for 1/8"-5/8" flange	25
CATHPAF14	11	Z purlin assembly for 1/16"-1/4" flange	50
CATHPVF14	12	C purlin assembly for 1/16"-1/4" vertical flange	50
CATHPESC	13	Easy strut assembly	50
CATHP4Z34	14	Rod/flange assembly for #12 SWG - 1/4" wire or plain rod, 1/4" threaded rod & 1/8"-3/8" flange	50
CATHP6Z34	14	Rod/flange assembly for 3/8" threaded rod & 3/8"-9/16" flange	50
CATHPCD0B	15	Underfloor assembly for 3/4" round pedestal	25
CATHPCD1B	15	Underfloor assembly for 7/8"-1" round pedestal or 3/4" square pedestal	25
CATHPCD2.5B	15	Underfloor assembly for 1" square pedestal	25
CATHPCD2B	15	Underfloor assembly for 7/8" square pedestal	25
CAT16HPTS	16	Acoustical tee bar assembly	2
CATHPPLR	17	Cable Puller for CATHP	2





Fig. #1



Fig. #2



Fig. #3



Fig. #4



Fig. #5



Fig. #6



Fig. #7



Fig. #8



Fig. #9



Fig. #10



Fig. #11



Fig. #12



Fig. #13



Fig. #14



Fig. #15



Fig. #16



Fig. #17

See page 214  
for the complete  
CADDY® CABLECAT  
Capacity Guide

## CADDY® CABLECAT

### Wide Base Cable Support

#### Features

- Provides proper support of Category 5e, Category 6, fiber optic and innerduct
- Many sizes and designs available to attach to a variety of structures.
- Cost effective alternative to expensive cable tray
- Galvanized finish on J-hooks provide smoother cable pull and greater corrosion resistance.
- cULus® listed and complies with NEC® and TIA<sup>SM</sup> requirements for structured cabling systems

\* Patent Number: 5,740,994

Part Number	Fig. #	Description	Standard Packaging Quantity
CAT12*	1	J-hook that accepts up to 16 4-pair UTP CAT 5e or 2-strand fiber optic cable, or 10 CAT 6 - 3/4" dia	50
CAT21*†	1	J-Hook that accepts up to 50 4-pair UTP CAT 5e or 2-strand fiber optic cable or innerduct, or 32 CAT 6 - 1 5/16" dia	80
CAT32*†	1	J-Hook that accepts up to 80 4-pair UTP CAT 5e or 2-strand fiber optic cable or innerduct, or 50 CAT 6 - 2" dia	60
CAT64*	1	J-Hook that accepts up to 300 4-pair UTP CAT 5e or 2-strand fiber optic cable, or 185 CAT 6 - 4" dia	25
CATHBA	2	Extended J-Hook angle bracket - 1/4" mounting hole	40
CATHBA3††	3	Extended J-Hook angle bracket - 3/16" mounting hole	40
CATHBA6	3	Extended J-Hook angle bracket - 3/8" mounting hole	40
CATHBA8	3	Extended J-Hook angle bracket - 1/2" mounting hole	40
CATKITA	4	CAT32 – 20 pieces; CATHBA Hanger – 5 pieces; BC200 Beam Clamps – 5 pieces	1
CATKITB	4	CAT21 – 10 pieces; CAT32 – 10 pieces; CATHBA Hanger – 5 pieces; BC200 Beam Clamps – 5 pieces (screws included)	1
CATKITC	4	CAT21 – 20 pieces; CATHBA Hanger – 5 pieces; BC200 Beam Clamps – 5 pieces (screws included)	1
CATTS	5	Support from tee grid	100

† Available in Stainless Steel

†† Load limits apply to CADDY® fasteners only.  
Pin must be evaluated separately.





Fig. #1



Fig. #2



Fig. #3



Fig. #4



Fig. #5



See page 214  
for the complete  
CADDY® CABLECAT  
Capacity Guide

## Metal Screws

### Features

- For CADDY® CABLECAT Wide Base Cable Support.

Part Number	Description	Standard Packaging Quantity
S3575BP100	1/4- 20 x 3/8" round head screw	100
S3575DP100	1/4- 20 x 3/4" round head screw	100

## CADDY® CABLECAT

Wide Base Cable Support Clips -  
3/4" Diameter Loop



Part Number	Fig. #	Description	Standard Packaging Quantity
CAT124Z34	1	3/4" J-Hook assembled to 4Z34 - #12 thru 1/4" wire, plain or threaded rod and 1/8" thru 3/8" flange	40
CAT126Z34	1	3/4" J-Hook assembled to 6Z34 - 3/8" plain or threaded rod and 3/8" thru 7/16" flange	60
CAT12TS	2	3/4" J-Hook assembled to Acoustical tee bar bracket	60
CAT12AB	3	3/4" J-Hook assembled to angle bracket - 1/4" mounting hole	40
CAT12AFAB3	4	3/4" J-Hook assembled to Angle Bracket Assembly - 3/16" mounting hole	40
CAT12VF14	5	3/4" J-Hook assembled to C purlin bracket - 1/16" thru 1/4" vertical flange	40
CAT12912SM	6	3/4" J-Hook assembled to hammer-on 1/2" thru 3/4" flange - side mount	40
CAT12912	7	3/4" J-Hook assembled to hammer-on 1/2" thru 3/4" flange - bottom mount rotates 360°	20
CAT1224SM	6	3/4" J-Hook assembled to hammer-on 1/8" thru 1/4" flange - side mount	40
CAT1224	7	3/4" J-Hook assembled to hammer-on 1/8" thru 1/4" flange - bottom mount rotates 360°	40
CAT1258SM	6	3/4" J-Hook assembled to hammer-on 5/16" thru 1/2" flange - side mount	40
CAT1258	7	3/4" J-Hook assembled to hammer-on 5/16" thru 1/2" flange - bottom mount rotates 360°	40
CAT12BC	8	3/4" J-Hook assembled to screw-on bracket - 1/8" thru 1/2" flange	40
CAT12BC200	9	3/4" J-Hook assembled to screw-on bracket - 1/8" thru 5/8" flange	40
CAT12BC200B	10	3/4" J-Hook assembled to screw-on bracket - 1/8" thru 5/8" flange - rotates 360°	40
CAT12BCB	8	3/4" J-Hook assembled to screw-on bracket 1/8" thru 1/2" flange - rotates 360°	40
CAT12CD1B	11	3/4" J-Hook assembled to under floor support to pedestal	40
CAT12AF14	12	3/4" J-Hook assembled to Z purlin bracket - 1/16" thru 1/4" Z purlin	40
CAT12ESC	13	Snap-in 3/4" Diameter J-Hook	60






Fig. #1



Fig. #2



Fig. #3



Fig. #4



Fig. #5



Fig. #6



Fig. #7



Fig. #8



Fig. #9



Fig. #10



Fig. #11



Fig. #12



Fig. #13

See page 214  
for the complete  
CADDY® CABLECAT  
Capacity Guide

## CADDY® CABLECAT

Wide Base Cable Support Clips  
- 1 5/16" Diameter Loop



Part Number	Fig. #	Description	Standard Packaging Quantity
CAT214Z34	1	1-5/16" J-Hook assembled to 4Z34 - #12 thru 1/4" wire, plain or threaded rod and 1/8" thru 3/8" flange	40
CAT216Z34	1	1-5/16" J-Hook assembled to 6Z34 - 3/8" plain or threaded rod and 3/8" thru 7/16" flange	60
CAT21AB	2	1-5/16" J-Hook assembled to angle bracket - 1/4" mounting hole	40
CAT21AFAB3	3	1-5/16" J-Hook assembled to Angle Bracket Assembly - 3/16" mounting hole	40
CAT21AFAB4	3	1-5/16" J-Hook assembled to Angle Bracket Assembly - 1/4" mounting hole	40
CAT21AFAB6	3	1-5/16" J-Hook assembled to Angle Bracket Assembly - 3/8" mounting hole	40
CAT21VF14	4	1-5/16" J-Hook assembled to C purlin bracket - 1/16" thru 1/4" vertical flange	40
CAT21912SM	5	1-5/16" J-Hook assembled to hammer-on 1/2" thru 3/4" flange - side mount	40
CAT21912	6	1-5/16" J-Hook assembled to hammer-on 1/2" thru 3/4" flange - bottom mount rotates 360°	20
CAT2124SM	5	1-5/16" J-Hook assembled to hammer-on 1/8" thru 1/4" flange - side mount	40
CAT2124	6	1-5/16" J-Hook assembled to hammer-on 1/8" thru 1/4" flange - bottom mount rotates 360°	40
CAT2158SM	5	1-5/16" J-Hook assembled to hammer-on 5/16" thru 1/2" flange - side mount	40
CAT2158	6	1-5/16" J-Hook assembled to hammer-on 5/16" thru 1/2" flange - bottom mount rotates 360°	40
CAT21BC	7	1-5/16" J-Hook assembled to screw-on bracket - 1/8" thru 1/2" flange	40
CAT21BC200	8	1-5/16" J-Hook assembled to screw-on bracket - 1/8" thru 5/8" flange	40
CAT21BC200B	9	1-5/16" J-Hook assembled to screw-on bracket - 1/8" thru 5/8" flange - rotates 360°	40
CAT21BCB	7	1-5/16" J-Hook assembled to screw-on bracket 1/8" thru 1/2" flange - rotates 360°	40
CAT21CD1B	10	1-5/16" J-Hook assembled to under floor support to pedestal	40
CAT21AF14	11	1-5/16" J-Hook assembled to Z purlin bracket - 1/16" thru 1/4" Z purlin	40
CAT21ESC	12	Snap-in 1 5/16" Diameter J-Hook	60







Fig. #1



Fig. #2



Fig. #3



Fig. #4



Fig. #5



Fig. #6



Fig. #7



Fig. #8



Fig. #9



Fig. #10



Fig. #11



Fig. #12

See page 214  
for the complete  
CADDY® CABLECAT  
Capacity Guide

## CADDY® CABLECAT

Wide Base Cable Support Clips -  
2" Diameter Loop



Part Number	Fig. #	Description	Standard Packaging Quantity
CAT324Z34	1	2" J-Hook assembled to 4Z34 - #12 thru 1/4" wire, plain or threaded rod and 1/8" thru 3/8" flange	40
CAT326Z34	1	2" J-Hook assembled to 6Z34 - 3/8" plain or threaded rod and 3/8" thru 7/16" flange	40
CAT32AB	2	2" J-Hook assembled to angle bracket - 1/4" mounting hole	40
CAT32AFAB3	3	2" J-Hook assembled to Angle Bracket Assembly - 3/16" mounting hole	40
CAT32AFAB4	3	2" J-Hook assembled to Angle Bracket Assembly - 1/4" mounting hole	40
CAT32AFAB6	3	2" J-Hook assembled to Angle Bracket Assembly - 3/8" mounting hole	40
CAT32VF14	4	2" J-Hook assembled to C purlin bracket - 1/16" thru 1/4" vertical flange	40
CAT32912SM	5	2" J-Hook assembled to hammer-on 1/2" thru 3/4" flange - side mount	40
CAT32912	6	2" J-Hook assembled to hammer-on 1/2" thru 3/4" flange - bottom mount rotates 360°	20
CAT3224SM	5	2" J-Hook assembled to hammer-on 1/8" thru 1/4" flange - side mount	40
CAT3224	6	2" J-Hook assembled to hammer-on 1/8" thru 1/4" flange - bottom mount rotates 360°	20
CAT3258SM	5	2" J-Hook assembled to hammer-on 5/16" thru 1/2" flange - side mount	40
CAT3258	6	2" J-Hook assembled to hammer-on 5/16" thru 1/2" flange - bottom mount rotates 360°	20
CAT32BC	7	2" J-Hook assembled to screw-on bracket - 1/8" thru 1/2" flange	40
CAT32BC200	8	2" J-Hook assembled to screw-on bracket - 1/8" thru 5/8" flange	20
CAT32BC200B	9	2" J-Hook assembled to screw-on bracket - 1/8" thru 5/8" flange - rotates 360°	20
CAT32BCB	7	2" J-Hook assembled to screw-on bracket 1/8" thru 1/2" flange - rotates 360°	20
CAT32CD1B	10	2" J-Hook assembled to under floor support to pedestal	20
CAT32AF14	11	2" J-Hook assembled to Z purlin bracket - 1/16" thru 1/4" Z purlin	40
CAT32ESC	12	Snap-in 2" Diameter J-Hook	40





Fig. #1



Fig. #2



Fig. #3



Fig. #4



Fig. #5



Fig. #6



Fig. #7



Fig. #8



Fig. #9



Fig. #10



Fig. #11



Fig. #12

See page 214  
for the complete  
CADDY® CABLECAT  
Capacity Guide

## CADDY® CABLECAT

Wide Base Cable Support Clips -  
4" Diameter Loop



Part Number	Fig. #	Description	Standard Packaging Quantity
CAT64AFAB3	1	4" J-Hook assembled to Angle Bracket Assembly - 3/16" mounting hole	25
CAT64AFAB4	1	4" J-Hook assembled to Angle Bracket Assembly - 1/4" mounting hole	25
CAT64AFAB6	1	4" J-Hook assembled to Angle Bracket Assembly - 3/8" mounting hole	25
CAT64VF14	2	4" J-Hook assembled to C purlin bracket - 1/16" thru 1/4" vertical flange	25
CAT64912SM	3	4" J-Hook assembled to hammer-on 1/2" thru 3/4" flange - side mount	25
CAT64912	4	4" J-Hook assembled to hammer-on 1/2" thru 3/4" flange - bottom mount rotates 360°	25
CAT6424SM	3	4" J-Hook assembled to hammer-on 1/8" thru 1/4" flange - side mount	25
CAT6424	4	4" J-Hook assembled to hammer-on 1/8" thru 1/4" flange - bottom mount rotates 360°	25
CAT6458SM	3	4" J-Hook assembled to hammer-on 5/16" thru 1/2" flange - side mount	25
CAT6458	4	4" J-Hook assembled to hammer-on 5/16" thru 1/2" flange - bottom mount rotates 360°	25
CAT64BC	5	4" J-Hook assembled to screw-on bracket - 1/8" thru 1/2" flange	25
CAT64BC200	6	4" J-Hook assembled to screw-on bracket - 1/8" thru 5/8" flange	25
CAT64BC200B	7	4" J-Hook assembled to screw-on bracket - 1/8" thru 5/8" flange - rotates 360°	25
CAT64BCB	5	4" J-Hook assembled to screw-on bracket 1/8" thru 1/2" flange - rotates 360°	25
CAT64CD1B	8	4" J-Hook assembled to under floor support to pedestal	25
CAT64AF14	9	4" J-Hook assembled to Z purlin bracket - 1/16" thru 1/4" Z purlin	25





Fig. #1



Fig. #2



Fig. #3



Fig. #4



Fig. #5



Fig. #6



Fig. #7



Fig. #8



Fig. #9

See page 214  
for the complete  
CADDY® CABLECAT  
Capacity Guide

## CADDY® CABLECAT Pulley

### Features

- CAT32PLR accepts up to 20 four-pair cables
- Complies with the TIA<sup>SM</sup> standard requirement by minimizing the pull force on the cable
- Frees up the “second man” on cable pulling
- Kit includes spring-loaded J-hook, pin, wheel and retainer, link, and beam clamp
- Maintains proper bend radius and protects cable during the installation
- When the job is complete, the pulley and pin assembly can be removed leaving the J-hook as a cable support
- CAT64PLR accepts up to 40 four-pair cables
- The CAT32PLR pulley components can be used on original design CAT32 J-hook
- The CAT64PLR pulley components can be used on original design CAT64 J-hook



Part Number	Description	Standard Packaging Quantity
CAT32PLR	Pulley kit - CAT32 2" spring-loaded J-hook, pin, wheel and retainer, link and beam clamp	10
CAT64PLR	Pulley kit - CAT64 4" spring-loaded J-hook, pin, wheel and retainer, link and beam clamp	2



## CADDY® CABLECAT

### Vertical Backbone Cable Support

#### Features

- Makes vertical cable pulling easier - locking mechanism opens during pull and re-engages when cable is released
- Accepts wide range of cable sizes: (75) 4-pair UTP CAT5E, (47) CAT6, (10) 25-pair UTP, (1) each 100-pair through 600-pair.
- Available as wall-mount (#CAT600WM) or strut-mount (#CAT600R)\*
- Strut-mount includes pre-riveted assembly that twist-locks into the strut
- Rounded edges help prevent cable damage
- Valuable space savings within telecomm closets
- More versatile allowing future additions of cable runs
- Reduces installation time
- Allows cable installation to start at the bottom floor
- Galvanized finish for corrosion protection



Fig. #1



Fig. #2



Part Number	Fig. #	Description	Standard Packaging Quantity
CAT600R	1	Vertical Cable Support - Strut mount	2
CAT600WM	2	Vertical Cable Support - Wall mount	2
CAT600RKIT	1	Vertical Cable Support - Strut mount kit with (1) 18" precut slotted strut & (4) CAT600R	1

See page 214  
for the complete  
CADDY® CABLECAT  
Capacity Guide

## Adjustable Cable Support



### Features

- Up to 425 4-pair UTP or 2-strand fiber optic cable, or 265 CAT6 - 4" or 6" dia. loop
- Provides proper support of Category 5e, Category 6, fiber optic and innerduct
- Multiple sizes and designs available to attach to a variety of structures
- Cost effective alternative to expensive cable tray
- cULus® listed and complies with NEC® and TIA<sup>SM</sup> requirements for structured cabling systems
- Suitable for air handling spaces (plenum)

Part Number	Fig. #	Description	Standard Packaging Quantity
<b>Adjustable Cable Support</b>			
CAT425	1	Adj. Cable Support for use with 1/4" Threaded rod or horizontal surface	10
CAT425A6	2	Adj. Cable Support with 3/8" Threaded rod or horizontal surface	10
CAT425WM	3	Adj. Cable Support with Wall mount - vertical surface	10
<b>Beam Clamp</b>			
CAT425BC	4	Adj. Cable Support with Screw-on 1/8" - 1/2" flange (rotates 360°)	10
CAT425BC200	5	Adj. Cable Support with Screw-on 1/8" - 5/8" flange (rotates 360°)	10
<b>Hammer on Flange Clip</b>			
CAT42524SM	6	Adj. Cable Support with Hammer-on 1/8" - 1/4" flange	10
CAT42558SM	6	Adj. Cable Support with Hammer-on 5/16" - 1/2" flange	10
CAT425912SM	6	Adj. Cable Support with Hammer-on 9/16" - 3/4" flange	10
<b>Purlin</b>			
CAT425AF14	7	Adj. Cable Support with Hammer-on 1/16" - 1/4" Z purlin	10
CAT425VF14	8	Adj. Cable Support with Hammer-on 1/16" - 1/4" vertical flange	10
CAT425WMCD1B	9	Adj. Cable Support with Under floor pedestal	10







Fig. #1



Fig. #2



Fig. #3



Fig. #4



Fig. #5



Fig. #6



Fig. #7



Fig. #8



Fig. #9

See page 214  
for the complete  
CADDY® CABLECAT  
Capacity Guide

## CADDY® CAT CM

### Features

- Specially designed U-Hooks and double J-Hooks have large- diameter, rounded support surfaces/edges to avoid over-bending and kinking of cables
- Cable support system offering unprecedented installation flexibility
- Compliant with NEC® and ANSI®/TIA<sup>SM</sup> structured cabling systems standards
- Hooks are cULus® listed
- Convenient pathway for wires and cables
- Rod-Mounted allows for field assembly onto All-Thread Rod
- Cantilever-Mounted allows U-hooks to be mounted with brackets to walls and columns



Part Number	Fig. #	Description	Standard Packaging Quantity
CAT100CM	1	Double J-Hook	20
CAT200CM*	2	U-Hook 200 mm/8" with T-nut	10
CAT200CMLN	2	U-Hook 200 mm/8" less nut	10
CAT300CM*	2	U-Hook 300 mm/12" with T-nut	10
CAT300CMLN	2	U-Hook 300 mm/12" less nut	10
CATRL200CM	3	Roller 200 mm/8" (incl. rod & nuts)	10
CATRL300CM	3	Roller 300 mm/12" (incl. rod & nuts)	10
CATRT200CM	4	Wire Retainer 200 mm/8"	50
CATRT300CM	4	Wire Retainer 300 mm/12"	50
CATTBCM	5	Protection Tube	30
CATWCM	6	Wall Bracket	10

\*Quick-Attach T-nut for HALFSLOT Strut

CABLE	CAT100CM ON ROD	CAT200CMLN ON ROD OR CANTILEVER	CAT300CMLN ON ROD OR CANTILEVER
4-pair UTP, Cat 5/5e	80	500	750
4-pair UTP, Cat 6	50	315	470
4-pair ScTP/FTP	40	250	375
4-pair STP	26	170	250
Area (sq. in.)	2 x 1.58	21.00	32.00





Fig. #1



Fig. #2



Fig. #3



Fig. #4



Fig. #5



Fig. #6

See page 214  
for the complete  
CADDY® CABLECAT  
Capacity Guide

## Multi-Purpose Clip

### Features

- Requires only a hammer to install
- Accommodates any beam flange from 1/8" to 1/2" thickness
- Accommodates standard 1/4-20 or #10-24 threaded bridle rings, standard drive rings as well as unthreaded bridle rings
- Supports drive rings or bridle rings from flange



Fig. #1

Part Number	Fig. #	Description	Standard Packaging Quantity
2FMP28	1	Multi-purpose clip that accommodates beam flange from 1/8" to 1/2"	100

**Note:** Drive rings not available from ERICO



## Cable Gripper

### Features

- Attaches to existing holes in metal studs without tools or with Metal Stud Punch (MSP20)
- Delivers compliance with: NEC® 300.4(d), CEC 12-510 and 12-516
- Installs easily to metal and wood studs
- Provides secure installation of multiple cables with unique locking/unlocking system
- Staples, nails or screws to wood stud
- Supports four NMC or eight 4-pair UTP, Category 5 and higher (electrical and datacomm cannot be combined)



Patent Number:  
5,626,316



Part Number	Description	Bag Qty
CG4	Cable Gripper cable support	100



Refer to part number  
MSP20 for the Metal  
Stud Punch

## Plain, Threaded And Wood Screw Bridle Rings

### Features

- When combined with other CADDY® Fasteners, Bridle Rings can be located on:
- "C" Purlins – VF144TI.
- "Z" Purlins – 1224TI or AF144TI.
- Acoustical T-Grid – ATS4I or ATA4I.
- Beam Flanges up to 3/4" – 2FMP28, BC, BC200, M912.
- Concrete – 4TIB.
- Drop Wire – 4Z34 - 6Z34.



Fig. #1

Part Number	Fig. #	Description	Standard Packaging Quantity
2BR8	1	Bridle ring 1/2" dia. #8 wire	100
2BR12	1	Bridle ring 3/4" dia. #8 wire	100
2BR20	1	Bridle ring 1-1/4" dia. #8 wire	100
2BR32	1	Bridle ring 2" dia. #8 wire	100
2BRT8	2	Bridle ring 1/2" dia. 10-24 threaded	100
2BRT12	2	Bridle ring 3/4" dia 10-24 threaded	100
2BRT20	2	Bridle ring 1-1/4" dia. 10-24 threaded	100
2BRT32	2	Bridle ring 2" dia. 10-24 threaded	100
4BRT20	2	Bridle Ring 1-1/4" dia. 1/4-20 threaded	100
4BRT32	2	Bridle Ring 2" dia. 1/4-20 threaded	100
4BRT64	2	Bridle Ring 4" dia. 1/4-20 threaded	50
4BRT20WS	3	Bridle Ring 1-1/4" dia. #14 wood screw thread	100
4BRT32WS	3	Bridle Ring 2" dia. #14 wood screw thread	100

**Notes:** Bridle Rings not recommended for high performance cables, see CADDY® CABLECAT series.



Fig. #2



Fig. #3



## CADDY® Mille-Tie™

### Features

- Suitable for heavy duty applications
- Maintains cable properties and conductor configuration
- Protects cable from crimping with "Intelligent Grip Technology"
- Cushions vibration
- No sharp edges
- One size fits all
- Reusable



Fig. #1


Part Number	Fig. #	Description	Standard Packaging Quantity
CATMTLS	1	Yellow CADDY Mille-Tie (Low Smoke - Zero Halogen)	1,000
CATMTP	2	Red CADDY Mille-Tie (suitable for air-handling spaces)	1,000
CATMTH	3	CADDY Mille-Tie Heavy Duty (Black)	100



Fig. #2



Fig. #3

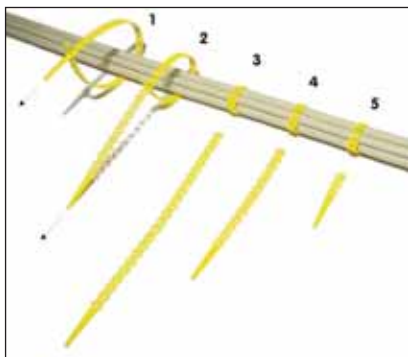

## CADDY® CAT CR50 Cable Retainer



### Features

- Allows for horizontal and vertical change of direction
- Complies with the NEC®, the CEC and TIA<sup>SM</sup> standards
- Installs easily\works with CAT 5e and higher, fiber optic and coaxial cable
- Residential Application
- Suitable for air-handling spaces (plenum rating)



Part Number	Description	Standard Packaging Quantity
CATCR50	Cable Retainer 50 mm, 2" dia.	25



See page 214  
for the complete  
CADDY® CABLECAT  
Capacity Guide



Mille-Tie is a trademark of Millepede International, Ltd.



## Camera, alarm and speaker hanging support solutions

### Features

- Reduces installation time
- Securely fastens cameras to various building structures
- Complies with codes and best practices



Fig. #1

Part Number	Fig. #	Description	Standard Packaging Quantity
SCMKB	1	Security Camera Mounting Kit - Beam	20
SCMKC	2	Security Camera Mounting Kit - Between T-grid	20
SCMKT	3	Security Camera Mounting Kit - T-grid	20
SCMKW	4	Security Camera Mounting Kit - Wall Mount	20



Fig. #2



Fig. #3



Fig. #4



## CADDY® LINIAN Clip

### Features

- After the hole is drilled, no tools are required for installation
- Corrosion-resistant coating
- Easily fixes fire-resistant cables to brickwork, concrete, masonry, wood studs and wood beams
- Independently tested to resist tensile loads of up to 24 lbs
- Installs up to 70% faster than saddle clips



Fig. #1

Part Number	Fig. #	Description	Standard Packaging Quantity
LI1	1	Cable clip for coax, control & alarm cable and speaker wire (6 to 8 mm)	100
LI2	1	Cable clip for coax, control & alarm cable and speaker wire (9 to 11 mm)	100
LI1B	2	Cable clip for coax, control & alarm cable and speaker wire (6 to 8 mm)	100
LI2B	2	Cable clip for coax, control & alarm cable and speaker wire (9 to 11 mm)	100
LI1W	3	Cable clip for coax, control & alarm cable and speaker wire (6 to 8 mm)	100
LI2W	3	Cable clip for coax, control & alarm cable and speaker wire (9 to 11 mm)	100



Fig. #2



Fig. #3



## Box Eliminator Conduit Support

### Features

- Eliminates need for electrical box when datacomm cables are run in conduit
- Supports 3/4", 1" and 1-1/4" conduit
- Easily attaches to the MP15 or MP25 low voltage mounting plates
- MP1SCB & MP2SCB mounting plate kits include: mounting plate, conduit support and screws



Fig. #1

Part Number	Fig. #	Description	Standard Packaging Quantity
MP1SCB	1	Single Gang Box Eliminator Conduit Support (Includes: MP15, MP1SCB1220 and screws)	25
MP2SCB	2	Double Gang Box Eliminator Conduit Support (Includes: MP25, MP1SCB1220 and screws)	25
MPCB1220	3	Box Eliminator Conduit Support (with screws)	25



Fig. #2




Fig. #3



## Low Voltage Mounting Bracket For New Construction

### Features

- Provides a bracket for mounting low voltage Class 2 communication outlets
- Reduces bulges in the dry wall caused by plaster rings
- May be installed to the front or the side of the metal or wood stud
- Side support provides for a rigid installation
- Attaches with self-tapping screws or nails
- Works with 1/2" and 5/8" dry wall
- Works with wood or metal studs



Fig. #1




Fig. #2

Notes: No Load Rating - Positioning Only

Part Number	Fig. #	Description	Standard Packaging Quantity
MP1S	1	Single gang plate mounting bracket for new work	25
MP2S	2	Double gang plate mounting bracket for new work	25



## Mounting Plate Brackets (Metallic)

### Screw-On Support

#### Features

- Provides positive support with locking screws
- Mounts any standard low voltage device in 1/2" through 1 1/4" walls
- Makes wire "fishing" easier
- Install with a drywall saw and screwdriver
- Eliminates the need for an electrical box when installing low voltage Class 2 wiring



Fig. #1

**Notes:** For low voltage Class 2 use only.


Part Number	Fig. #	Description	Standard Packaging Quantity
MP1	1	Single gang Mounting Plate Brackets (no screws included)	100
MPLS	2	Single gang Mounting Plate Brackets screws to drywall (screws included)	100
MPLS2	3	Double gang Mounting Plate Brackets screws to drywall (screws included)	100



Fig. #2



Fig. #3



## Within Wall Mounting Plate

### MP1WWM

#### Features

- Unique installation eliminates excess movement
- Fits any drywall thickness
- Designed to eliminate gaps between the wall and faceplate
- Highly visible yellow material helps prevent incorrect installation
- Template dimples on the bracket provide measurement markings for simplified installation
- Securing pins lock the plate into the drywall
- Convenient removable tether assists with positioning
- cULus® Listed



Part Number	Description	Standard Packaging Quantity
MP1WWM	Within Wall Mounting Plate	100



## Mounting Plate Brackets (Non-Metallic)

### Features

- No sharp metal edges with plastic design
- Fast, easy way to install
- No installation tools required to secure bracket in the drywall opening
- Serrated interlocking system secures tightly
- Template points on brackets help eliminate multiple measurement markings during installation
- Recessed design helps assure flush mount of device
- Only CADDY® provides the industry with the widest application range 1/4" to 1 1/4" wall thickness
- Available in single gang, double gang and a unique 3-4 gang sizes
- Eliminates the need for electrical boxes on low voltage class 2 applications



Fig. #1

**Notes:** For low voltage Class 2 use only.

No Load Rating - Positioning Only

Part Number	Fig. #	Description	Standard Packaging Quantity
MP1P	1	Non-Metallic Single gang mounting plate	100
MPAL2	2	Non-Metallic double gang mounting plate	100
MP34P	3	Non-Metallic 3 or 4 gang mounting plate	2



Fig. #2



Fig. #3



## Metal Stud Punch And Easy Snap Grommet

### Features

- Cushioned handles mean less operator fatigue and more comfortable handling
- Tool design with offset handles allows punch to work in confined locations and near perpendicular walls
- Lightweight punch makes accurate location of holes easier
- Hardened steel components keep tool sharper longer – less replacement
- Punches up to 20 gauge sheet metal
- Plastic grommets snap easily into 1-11/32" hole



Fig. #1



Part Number	Fig. #	Description	Standard Packaging Quantity
MSP20	1	Metal Stud Punch	1

### Features

- Snap one grommet into standard 1-11/32" field punched hole, OR snap tight two together into any shape factory punched hole
- Provides 360° protection for cable and makes cable pulls easier



Fig. #2

Part Number	Fig. #	Description	Standard Packaging Quantity
ESG1	2	Metal Stud Grommet	100
ESG1M	2	Metal Stud Grommet	1,000
ESGP	3	Metal Stud Anti-Rattle Grommet	100



Fig. #3





## Wire Basket Tray Clip














### Features

- Attaches wire basket tray to strut without any additional hardware.
- Fits tray wires from 4mm to 8mm (3/16" to 5/16").
- No tools required.



Part Number	Description	Standard Packaging Quantity
KBT	Wire Basket Tray Clip	1

- \* For trays 300mm (12") or under use 2 clips per strut support.
- \* For trays 457mm (18") or under use 3 clips per strut support.
- \* For larger trays add one (1) clip per strut support for every 150mm (6") of tray width.
- \* For positioning only (no load rating).

CADDY® CABLECAT Capacity Guide			
Area (sq. in.)	Capacity (4-pair)		Part Number
	Cat. 5e	Cat. 6	
0.60	16	10	CAT12 
2.16	50	32	CAT21 
3.17	80	50	CAT32 
2 x 1.58	80	50	CAT100CM 
15.28	300	220	CAT64 
20.43	425	265	CAT425 
21.00	500	315	CAT200CMLN 
32.00	750	470	CAT300CMLN 
3.14	75	47	CAT600 
1.07	25	15	CAT16HP 
3.97	95	60	CAT32HP 
9.26	220	140	CAT48HP 
15.48	380	230	CAT64HP 
2.67	50	36	CATCR50 